


Parallel Connected Capacitors
250 V, 50/60 Hz

Capacitors type A

Casing: plastics, white or aluminium
Fastening: male nipple
with nut and washer included
Discharge resistance
Optional: thermal cut-out,
European wide patent
On request with alternative capacities,
connection terminals, mounting options,
casing materials or with a thermal fuse
as well as versions with IDC terminal for
the automatic luminaire wiring




Ref. No.	Capacity µF	Temperature range °C	Ø (D) mm	length (L) mm	Male nipple/ length (mm)	Push-in twin terminals	Weight g	Unit pcs.
Plastic casing								
500296	2.0	-40 to 85	30	53	M8x10	0.5-1 mm ²	22	530
500299	2.5	-40 to 85	30	53	M8x10	0.5-1 mm ²	22	530
500300	3.0	-40 to 85	25	57	M8x10	0.5-1 mm ²	22	530
500301	3.5	-40 to 85	30	53	M8x10	0.5-1 mm ²	22	530
500302	4.0	-40 to 85	30	53	M8x10	0.5-1 mm ²	22	450
500303	4.5	-40 to 85	30	53	M8x10	0.5-1 mm ²	22	450
500304	5.0	-40 to 85	30	53	M8x10	0.5-1 mm ²	22	450
500305	6.0	-40 to 85	30	53	M8x10	0.5-1 mm ²	22	450
506495	7.0	-40 to 85	30	53	M8x10	0.5-1 mm ²	22	320
502783	8.0	-40 to 85	30	69	M8x10	0.5-1 mm ²	24	320
504351	9.0	-40 to 85	30	69	M8x10	0.5-1 mm ²	32	320
508667	10.0	-40 to 85	30	69	M8x10	0.5-1 mm ²	32	320
506366	12.0	-40 to 85	30	78	M8x10	0.5-1 mm ²	32	260
508468	15.0	-40 to 85	30	93	M8x10	0.5-1 mm ²	36	260
508668	16.0	-40 to 85	30	93	M8x10	0.5-1 mm ²	32	260
500315	18.0	-40 to 85	35	93	M8x10	0.5-1.5 mm ²	36	190
500316	20.0	-40 to 85	35	93	M8x10	0.5-1.5 mm ²	55	190
500317	25.0	-40 to 85	35	93	M8x10	0.5-1.5 mm ²	66	80
500318	30.0	-40 to 85	40	93	M8x10	0.5-1.5 mm ²	72	100
Aluminium casing								
500319	32.0	-40 to 85	35	135	M8x10	0.5-1.5 mm ²	110	50
500320	35.0	-40 to 85	40	139	M8x10	0.5-1.5 mm ²	127	36
500321	40.0	-40 to 85	40	139	M8x10	0.5-1.5 mm ²	127	36
536406	45.0	-40 to 85	40	103	M8x10	0.5-1.5 mm ²	120	36
500322	50.0	-40 to 85	45	103	M8x10	0.5-1.5 mm ²	150	32
500323	55.0	-40 to 85	45	135	M8x10	0.5-1.5 mm ²	159	32

Parallel Connected Capacitors with Leads 250 V, 50/60 Hz

Capacitors type A

Casing: plastics, white
Fastening: male nipple with nut and washer included
Discharge resistance
Fixing centres: 20 mm
Optional: thermal cut-out, European wide patent
On request with alternative capacities, connection terminals, mounting options, casing materials or with a thermal fuse as well as versions with IDC terminal for the automatic luminaire wiring

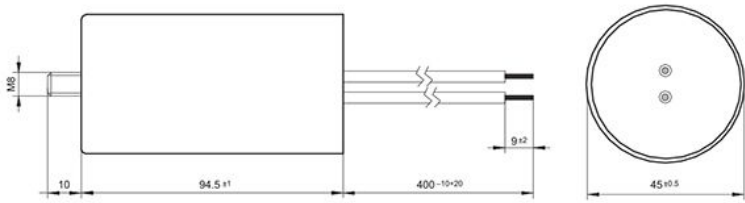

Ref. No.	Capacity μF	Temperature range °C	Ø (D) mm	Length (L) mm	Male nipple/ length (mm)	Lead length mm	Weight g	Unit pcs.
Plastic casing								
552774	2.0	-25 to 85	25	57	M8x10	150	22	400
526169	4.0	-25 to 85	25	63	M8x10	250	31	350
526170	6.0	-40 to 85	28	54	M8x10	250	22	320
526171	8.0	-40 to 85	32	67	M8x10	250	24	220
529665	10.0	-40 to 85	32	67	M8x10	200	32	280
536742	12.0	-25 to 85	30	78	M8x10	150	42	120
529666	16.0	-25 to 85	35	73	M8x10	200	52	120
536741	20.0	-40 to 85	36	92	M8x10	150	85	160
508484	25.0	-25 to 85	40	93	M8x10	250	89	80
536743	30.0	-25 to 85	40	93	M8x10	150	108	80
528554	35.0	-25 to 85	45	94	M8x10	250	173	60
536813	40.0	-25 to 85	45	94	M8x10	400	166	60
528555	45.0	-25 to 85	50	94	M8x10	250	167	50