

Parallel Connected Capacitors with Break-action Mechanism

Capacitors type B

Casing: aluminium

Filling material: based on vegetable oil

Fastening: male nipple
with nut and washer included


Discharge resistance

Overpressure protection


On request further capacities or connectors



A Push-in twin terminals 0.5–1 mm²

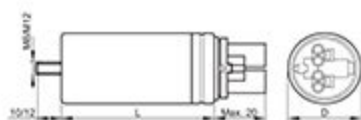

B Double spade connector 6.3x0.8 acc. to IEC 61210

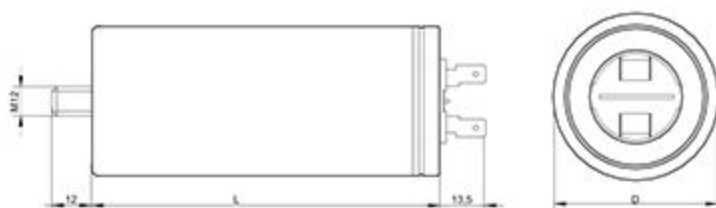

Parallel Connected Capacitors with Break-action Mechanism

Capacitors type B

Ref. No.	Capacity μF	Temperature range $^{\circ}\text{C}$	Drawing	$\varnothing$ (D) mm	Length (L) mm	Male nipple/ length (mm)	Weight g	Unit pcs.
250 V, 50/60 Hz								
536378	2.0	-40 to 100	A	25	63	M8x10	85	100
536379	4.0	-40 to 100	A	25	63	M8x10	80	100
536380	6.0	-40 to 100	A	25	63	M8x10	80	100
536381	8.0	-40 to 100	A	25	63	M8x10	85	100
551645	9.0	-40 to 100	A	30	78	M8x10	95	100
536382	10.0	-40 to 100	A	30	78	M8x10	90	100
536383	12.0	-40 to 100	A	30	78	M8x10	90	100
536384	13.0	-40 to 100	A	30	78	M8x10	90	100
536385	16.0	-40 to 100	A	35	78	M8x10	90	81
536386	18.0	-40 to 100	A	35	78	M8x10	90	81
536387	20.0	-40 to 100	A	35	78	M8x10	90	81
536388	25.0	-40 to 100	A	40	78	M8x10	100	64
536389	30.0	-40 to 100	A	35	103	M8x10	100	81
536390	32.0	-40 to 100	A	35	103	M8x10	120	81
536391	35.0	-40 to 100	A	40	103	M8x10	120	64
536392	40.0	-40 to 100	A	40	103	M8x10	120	64
536393	45.0	-40 to 100	A	40	103	M8x10	150	64
536394	50.0	-40 to 100	A	45	103	M8x10	150	49
536395	55.0	-40 to 100	A	45	103	M8x10	150	49
536396	60.0	-40 to 100	A	45	103	M8x10	200	49
380-450 V, 50/60 Hz								
536397	13.0	-40 to 85	A	35	103	M8x10	100	81
536398	18.0	-40 to 85	A	40	103	M8x10	120	64
536399	28.0	-40 to 85	A	45	103	M8x10	150	49
536400	32.0	-40 to 85	A	45	103	M8x10	200	49
536401	37.0	-40 to 85	A	50	103	M12x12	200	36
536402	50.0	-40 to 85	A	55	103	M12x12	250	36
536403	55.0	-40 to 85	B	50	128	M12x12	250	36
536404	60.0	-40 to 85	B	55	128	M12x12	250	36
536405	85.0	-40 to 85	B	60	138	M12x12	300	36